

FORM-PTO-1390  
(Rev. 12-29-99)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

030681-301

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5)

Unassigned

09/831337

INTERNATIONAL APPLICATION NO.  
PCT/KR99/00567INTERNATIONAL FILING DATE  
September 20, 1999PRIORITY DATE CLAIMED  
November 7, 1998

TITLE OF INVENTION  
**TENSION FORCE ADJUSTABLE PRESTRESSED GIRDER**

APPLICANT(S) FOR DO/EO/US  
**Man-yop HAN**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and the PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
   
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

PCT Request and International Search Report

U.S. APPLICATION NO. (If known) / See 37 CFR 1.55 <b>Unassigned</b>		INTERNATIONAL APPLICATION NO. <b>PCT/KR99/00567</b>		ATTORNEY'S DOCKET NUMBER <b>030681-301</b>	
--	--	--	--	---	--


<p>17. <input type="checkbox"/> The following fees are submitted:</p> <p><b>Basic National Fee (37 CFR 1.492(a)(1)-(5)):</b></p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO ..... \$1,000.00 (960)</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO ..... \$860.00 (970)</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$710.00 (958)</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$690.00 (956)</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00 (962)</p> <p style="text-align: right;"><b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b></p>	<b>CALCULATIONS</b>	<b>PTO USE ONLY</b>																				
	\$ 860.00																					
<p>Surcharge of \$130.00 (154) for furnishing the oath or declaration later than 20 <input type="checkbox"/> 30 <input type="checkbox"/> months from the earliest claimed priority date (37 CFR 1.492(e)).</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:20%;">Claims</th> <th style="width:20%;">Number Filed</th> <th style="width:20%;">Number Extra</th> <th style="width:20%;">Rate</th> <th style="width:20%;"></th> </tr> <tr> <td>Total Claims</td> <td>6 -20 =</td> <td>0</td> <td>X\$18.00 (966)</td> <td>\$</td> </tr> <tr> <td>Independent Claims</td> <td>2 -3 =</td> <td>0</td> <td>X\$80.00 (964)</td> <td>\$</td> </tr> <tr> <td colspan="3">Multiple dependent claim(s) (if applicable)</td> <td>+ \$270.00 (968)</td> <td>\$</td> </tr> </table> <p style="text-align: right;"><b>TOTAL OF ABOVE CALCULATIONS =</b></p>	Claims	Number Filed	Number Extra	Rate		Total Claims	6 -20 =	0	X\$18.00 (966)	\$	Independent Claims	2 -3 =	0	X\$80.00 (964)	\$	Multiple dependent claim(s) (if applicable)			+ \$270.00 (968)	\$	\$	
Claims	Number Filed	Number Extra	Rate																			
Total Claims	6 -20 =	0	X\$18.00 (966)	\$																		
Independent Claims	2 -3 =	0	X\$80.00 (964)	\$																		
Multiple dependent claim(s) (if applicable)			+ \$270.00 (968)	\$																		
Reduction for 1/2 for filing by small entity, if applicable (see below).	\$ 430.00	-																				
<b>SUBTOTAL =</b>	\$ 430.00																					
<p>Processing fee of \$130.00 (156) for furnishing the English translation later than 20 <input type="checkbox"/> 30 <input type="checkbox"/> months from the earliest claimed priority date (37 CFR 1.492(f)).</p> <p style="text-align: right;"><b>TOTAL NATIONAL FEE =</b></p>	\$ 430.00																					
<p>Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 (581) per property +</p> <p style="text-align: right;"><b>TOTAL FEES ENCLOSED =</b></p>	\$ 430.00																					
	<b>Amount to be: refunded</b>	\$																				
	<b>charged</b>	\$																				

- a. ☐ Small entity status is hereby claimed.
- b. ☒ A check in the amount of \$ 430.00 to cover the above fees is enclosed.
- c. ☐ Please charge my Deposit Account No. 02-4800 in the amount of \$ \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- d. ☐ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 02-4800. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Robert E. Krebs  
 BURNS, DOANE, SWECKER & MATHIS, L.L.P.  
 P.O. Box 1404  
 Alexandria, Virginia 22313-1404  
 (650)622-2300

  
 \_\_\_\_\_  
 SIGNATURE

Robert E. Krebs  
 NAME

25,885  
 REGISTRATION NUMBER

09/831337

JC08 Rec'd PCT/PTO 07 MAY 2007

EXPRESS MAIL:

"Express Mail" mailing label No. EL545094151US  
Date of Deposit May 7, 2001

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Seini Matangi

(Typed or printed name of person mailing paper or fee)

(Signature of person mailing paper or fee)

09/831337

09/831337

JC08 Rec'd PCT/PTO 07 MAY 2001

Patent

Attorney's Docket No. 030681-301

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re Patent Application of )  
Man-yop HAN ) Group Art Unit: Unassigned  
Application No.: Unassigned ) Examiner: Unassigned  
Filed: Herewith )  
For: TENSION FORCE ADJUSTABLE )  
PRESTRESSED GIRDER )

**PRELIMINARY AMENDMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Prior to examination, please amend the subject application as follows:

**IN THE SPECIFICATION**

Please amend the specification by inserting before the first line the sentence:

"This application is a national phase of PCT/KR99/00567, and International Application  
No. 98-47661, which was filed on November 7, 1998, which was published in English."

**REMARKS**


Entry of the foregoing amendment to the Specification is requested to comply with the requirements of 37 C.F.R. 1.78(a)(2).

If the Examiner should be of the opinion that a telephone conference would be helpful in resolving any outstanding issues, the Examiner is urged to contact the undersigned.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

By: \_\_\_\_\_

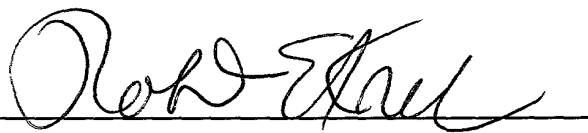

Robert E. Krebs  
Registration No. 25,885

Post Office Box 1404  
Alexandria, Virginia 22313-1404  
(650) 622-2300

Date: May 7, 2001

## BACKGROUND OF THE INVENTION

The present invention relates to a girder, and more particularly, to a tension force adjustable prestressed girder which can compensate for sagging or cracks of a girder generated due to a long-term load and is capable of adjusting a tension force by increasing a load-resisting force of a bridge or building, if necessary, after the construction thereof.

In general, when girders installed on a column of a concrete bridge become obsolete as time passes or heavy vehicles exceeding the originally designed weight allowance of a bridge pass over the bridge for a prolonged period, the beam of the bridge may become damaged and an excessive sagging may occur at the girders. Concurrently, bending/tensile cracks are generated and, when such damage continues, the bridge may ultimately collapse. Thus, appropriate repair and reinforcement of the bridge is required.

Meanwhile, a prestressed concrete (PSC) bridge is repaired and reinforced by means of an external steel wire reinforcement construction method. According to the above reinforcement construction method, an externally installed steel wire is to be fixed appropriately at an end portion of a girder. However, it is difficult to install a wire fixing apparatus at the end portion of a girder and reliability on the load-resisting force of the wire fixing apparatus is not assured. Thus, although other methods have been suggested and applied, no effective apparatuses have been developed yet. That is, when cracks and sagging occur in a PCS bridge, it is very difficult to repair and reinforce the bridge.

Also, as the traffic volume continuously increases and automobile manufacturing technologies develop, the weight of a vehicle increases. With an increase in the weight of a vehicle, the specifications which is a standard of designing a bridge must be modified. Modifications of the specifications necessarily results in an unbalanced load-resisting state, i.e., the load-resisting forces of the existing bridges are not matched. In other words, in a state in which roads allowing

passage of heavy trucks and roads not allowing passage of heavy trucks exist together, the efficiency of transportation network system as a whole is severely lowered. Thus, to make the unbalanced load-resisting forces of these bridges consistent, an economical reinforcement method for upgrading the level of the bridge from 2 to 1 must be urgently found.

As the width of a road increases due to an increase in the number of lanes of a road, the development of a wide span girder for constructing an elevated road or an overpass crossing a wide road has proceeded. Although a preflex beam has been developed and used for the above purposes, conveying the girder is inconvenient due to the length thereof and because the costs are high.

Currently, high strength concrete is used for a girder less than 30 m long that is not a wide span girder. However, as a high tension force is applied to the girder, the amount of creep generated becomes great. As the creep increases, the girder sags further which directly affects the longitudinal alignment of the road. When the longitudinal alignment deteriorates, a coefficient of impact by passing vehicles increases. Thus, in the case of a high strength girder or a wide span girder, when the girder is used for a long time, an appropriate construction method for compensating for sagging of the girder is required.

Also, the height of a girder which is long in span is relatively high such that the girder itself is 2.00 m - 3.00 m high. Such a fact entails an increase in the height of an upper deck of an overpass so that, to secure a longitudinal alignment of the overpass matching the designed vehicle speed, the length of the overpass becomes longer, thus raising the construction costs. In the case of a bridge crossing a river, to lower the height of the girder as low as possible is inevitably needed for improving the usability and the economic value of the girder.

FIG. 1 shows the structure of a general bridge. As shown in the drawing, a plurality of I-type girders 12 are installed on a column 10. An upper deck slab (not shown) is installed on the girders 12 of the bridge.

FIG. 2 is a sectional view showing a girder in which steel wires are arranged according to the conventional technology. As shown in the drawing, a girder 20 consists of a body portion 22, an upper flange 28, and a lower flange 24. A plurality of steel wires 26 are built in the body portion 22 in the lengthwise direction. An

upper deck of a bridge is installed on the upper flange 28 and the bottom surface of the lower flange 24 is supported by the column 10.

After the I-type girder 20 according to the conventional technology is constructed, when the bridge is damaged, that is, sagging or cracks are generated due to the increased traffic volume passing over the bridge, or when the designed passage load must be increased according to the revision of the specifications, reinforcement of the bridge is required. However, there are no economical and reliable reinforcement methods applicable therefor.

### SUMMARY OF THE INVENTION

It is an objective of the present invention to provide a prestressed girder of which a tension force can be adjusted by adjusting a tension force of a steel wire provided in a body portion or lower flange of the girder to easily increase a load-resisting force of a bridge or building, when excessive sagging or cracks are generated in a girder due to long-term use or when there is a need to increase the load-resisting force of the bridge or building without damaging the bridge or building.

Accordingly, to achieve the above objective, there is provided a tension force adjustable prestressed girder for adjusting a load-resisting force which consists of an upper flange supporting an upper deck of a bridge installed thereon, a body portion, and a lower flange, which includes tension steel wires provided in a lengthwise direction of the girder and tensioned to compensate for the load-resisting force, and at least one or more non-tension steel wires provided in the lengthwise direction of the girder, so that the load-resisting force of the bridge can be increased by tensioning the non-tension steel wires.

It is preferred in the present invention that the tension force adjustable prestressed girder further comprises a cut-open portion at a predetermined portion in the lengthwise direction of the girder and a coupling member installed at the cut-open portion for fixing one ends of the steel wires of which the other ends are fixed at an end portion of the girder.

According to another preferred embodiment of the present invention, there is provided a tension force adjustable prestressed girder for adjusting a load-resisting force which consists of an upper flange supporting an upper deck of a bridge

installed thereon, a body portion, and a lower flange, which includes tension steel wires provided in a lengthwise direction of the girder and tensioned to compensate for the load-resisting force, and one or more non-tension steel wires provided in the lengthwise direction of the girder, so that the load-resisting force of the bridge can be increased by tensioning the non-tension steel wires during construction of the girder and/or after the construction thereof.

Although the present invention can be applied to any type of girder regardless of the shape of the section of the girder such as an I-type girder or a bulb T-type girder, the I-type girder is described in the below preferred embodiment.

### BRIEF DESCRIPTION OF THE DRAWINGS

The above object and advantages of the present invention will become more apparent by describing in detail a preferred embodiment thereof with reference to the attached drawings in which:

FIG. 1 is a perspective view showing the structure of a general bridge;

FIG. 2 is a sectional view showing the arrangement of steel wires in the girder according to conventional technology;

FIG. 3A is a sectional view showing the arrangement of steel wires in the middle portion of a girder according to the present invention;

FIG. 3B is a sectional view showing the steel wires according to another preferred embodiment of the present invention;

FIG. 4A is a sectional view showing the arrangement of steel wires at the end portion of the girder of FIG. 3A;

FIG. 4B is a sectional view showing the arrangement of steel wires at the end portion of the girder of FIG. 3B;

FIG. 5 is a view showing a cut-open portion located at the middle portion of the girder and the arrangement of the steel wires in the girder;

FIG. 6 is a side view showing an example of a steel wire fixed at the end portion of the girder; and

FIG. 7 is a perspective view showing an example of the steel wires in the cut-open portion.

## DETAILED DESCRIPTION OF THE INVENTION

In FIG. 3A, a girder 40 includes an upper flange 28, a lower flange 24, and a body portion 22. One or more tension steel wires 26 and non-tension steel wires 27 are built in and across the lower portion of the body portion 22 and the lower flange 24 of the girder 40 in the lengthwise direction of the girder 40.

Preferably, the non-tension steel wires 27 are built in the lower flange 28 horizontally parallel to each other, as shown in FIG. 3A. The upper flange 28 is provided above the body portion 22 in the latitudinal direction in the section of the girder 40 and an upper deck of a bridge is installed on the upper flange 28. The lower flange 24 is provided below the body portion 22 in the latitudinal direction in the section of the girder 40 and the bottom surface thereof is supported by a column (not shown).

FIG. 3B shows a steel wire according to another preferred embodiment of the present invention. As shown in the drawing, a plurality of non-tension steel wires 27a are provided in the lengthwise direction of the girder 40 outside the lower portion of the body portion 22. The non-tension steel wires 27a have the same function as that of the non-tension steel wire 27 provided in the lower flange 24, as shown in FIG. 3A. That is, after a bridge is constructed, sagging of the girder 40 is compensated for by tensioning the non-tension steel wires 27a. Also, the non-tension steel wires 27a can be more easily installed compared to a case of being installed inside the lower flange 24.

FIG. 4A shows the arrangement of the steel wires built in the girder of FIG. 3A. As shown in the drawing, the tension steel wires 26 and the non-tension steel wires 27 concentrated at the lower portion of the girder 40 are distributed throughout the entire sectional portion of the girder 40. That is, the steel wires are evenly distributed symmetrically in up/down and left/right sides of the girder 40 so that the tension force by the tension steel wires 26 and the non-tension steel wires 27 can be evenly distributed throughout the entire portion of the girder 40.

FIG. 4B shows the arrangement of the steel wires at the end portion of the girder shown in FIG. 3B. As shown in the drawing, the tension steel wires 26 or the non-tension steel wires 27 and 27a concentrated at the lower portion of the girder as shown in FIG. 3B are evenly distributed symmetrically in the up/down and left/right

sides so that the tension force by the tension or non-tension steel wires 26, 27 or 27a are evenly distributed throughout the entire portion of the girder 40.

FIG. 5 shows the arrangement of the steel wires in the lengthwise direction in the girder of FIG. 3A and a cut-open portion located in the middle of the girder. The tension steel wires 26 and the non-tension steel wires 27 provided inside the girder 40 are concentrated in the lower portion at the middle portion of the girder 40 and evenly distributed throughout the entire sectional portion of the girder 40 at both end portions of the girder 40. The tension and non-tension steel wires 26 and 27 are fixed at both ends of the girder 40 by a fixing means 32 which is an anchoring device. The fixing member 32 is covered with concrete (not shown) after the girder 40 is constructed.

Here, when the girders are installed having intervals therebetween, or when a portion of the end of the girder is cut away, as shown in the drawing, a space is formed between the adjacent girders. Thus, a tensioning work can be performed in the space when the tension and non-tension steel wires 26 and 27 are to be re-tensioned later. However, in this case, the end portion of the girder 40 must not be covered with concrete. Here, one end of the non-tension steel wires 26 and 27 is exposed at either end portions of the girder 40 to apply a tension force.

Also, in a preferred embodiment, the girder is provided with a cut-open portion 36 for adjusting the tension force of the non-tension steel wires 27 at the middle portion of the girder or at another appropriated position. The cut-open portion 36 is used as a space for accommodating a coupling member of the non-tension steel wires 27. That is, the cut-open portion 36 is used as a working space for adjusting the tension force of the non-tension steel wires 27 later.

When cracks 34 or excessive sagging 35 indicated by a dotted line is generated to the girder 40 according to the present invention, as shown in FIG. 5, one or more non-tension steel wires 27 and 27a installed inside or outside the girder 40 are additionally tensioned for reinforcement. Here, the additional tensioning work for the non-tension steel wires 27 and 27a is performed using a hydraulic jack. Also, the tension forces of the non-tension steel wires 27 and 27a are adjusted during or after slab casting and after construction, the tension force is adjusted while the bridge is in use. That is, in the case of a continuous bridge, re-tensioning can

be performed before slab casting. However, in the present invention, the re-tensioning is performed shortly after the slab casting before slab concrete is hardened to prevent application of a tension force on the slab.

FIG. 6 shows a preferred embodiment of fixing the steel wire at the end portion of the girder. The steel wire 26 is anchored using a support member 50 as an anchoring device. For example, the steel wires 26 is inserted into a hole formed at the center of the support member 50 at one end of the girder 40. A plurality of wedges 52 are inserted between the steel wire 26 and the support member 50. Here, the steel wire 26 is tensioned by a hydraulic jack and the tensioned steel wire 26 is fixed by the wedges 52.

FIG. 7 shows that steel wires are coupled by the coupling member as a preferred embodiment of a steel wire connection in the cut-open portion. As shown in the drawing, the cut-open portion 36 is formed in the middle of the bottom surface of the girder 40 in the lengthwise direction. The steel wires 26 fixed at both ends of the girder 40 are connected to a coupling member 62 such that forces of different directions are applied. Here, the tension steel wire 26 to be connected at the coupling member 62 is connected using the support member 50 and the wedges 52.

Thus, the non-tension steel wires 27 connected to each other by the coupling member 62 is tensioned and fixed by using the wedges 52 so that the tension force by the tension steel wire 26 can be maintained. Also, by applying a tension force to the non-tension steel wires 27 and 27a provided at left and right sides of the girder 40, bending of the girder 40 to the left or right can be compensated for.

According to the arrangement of steel wires and the coupling apparatus the present invention, when a bridge is constructed or at an initial stage of construction, the steel wires 26 and 27 are connected to the coupling member 62 to be capable of moving to a degree, while the steel wires installed outside the girder 40 are not tensioned at all or tensioned by a small tension force so as to increase the tension forces of the steel wire later.

Although a bridge is described as an example in the above preferred embodiment, the tension force adjustable prestressed according to the present invention can be applied to other concrete structure such as a building as another preferred embodiment.

It is noted that the present invention is not limited to the preferred embodiment described above, and it is apparent that variations and modifications by those skilled in the art can be effected within the spirit and scope of the present invention defined in the appended claims.

5 As described above, according to the present invention, cracks and sagging of a bridge generated due to long-term deterioration, creep or overload can be corrected by additionally tensioning steel wires installed internally or externally at a girder of the bridge. Thus, repair and reinforcement of the bridge is easy so that the load-resisting force of the bridge can be easily increased. Also, by adjusting the  
10 tension force step by step, the girder can be economically manufactured or the height of the girder can be decreased.

What is claimed is:

1           1.     A tension force adjustable prestressed girder for adjusting a load-  
2     resisting force which consists of an upper flange supporting an upper deck of a  
3     bridge or building installed thereon, a body portion, and a lower flange, said  
4     prestressed girder comprising:

5                 tension steel wires provided in a lengthwise direction of said girder and  
6     tensioned to compensate for said load-resisting force; and

7                 at least one or more non-tension steel wires provided in the lengthwise  
8     direction of said girder, so that the load-resisting force of said bridge or building can  
9     be increased by tensioning said non-tension steel wires.

1           2.     The tension force adjustable prestressed girder as claimed in claim 1,  
2     further comprising a cut-open portion at a predetermined portion in the lengthwise  
3     direction of said girder and a coupling member installed at said cut-open portion for  
4     fixing one ends of said steel wires of which the other ends are fixed at an end  
5     portion of said girder.


1           3.     The tension force adjustable prestressed girder as claimed in claim 1,  
2     wherein said coupling member comprises a support member having holes formed  
3     therein through which one ends of said steel wires having the other ends thereof  
4     fixed at an end portion of said girder penetrate, and wedges inserted between said  
5     steel wire and said support member.

1           4.     The tension force adjustable prestressed girder as claimed in claim 1,  
2     wherein one end of said non-tension steel wire is exposed at either end portions of  
3     said girder to apply a tension force.


1           5.     A tension force adjustable prestressed girder for adjusting a load-  
2     resisting force which consists of an upper flange supporting an upper deck of a  
3     bridge or building installed thereon, a body portion, and a lower flange, said  
4     prestressed girder comprising:

5           tension steel wires provided in a lengthwise direction of said girder and  
6           tensioned to compensate for said load-resisting force; and  
7           one or more non-tension steel wires provided in the lengthwise direction of  
8           said girder, so that the load-resisting force of said bridge or building can be  
9           increased by tensioning said non-tension steel wires during construction of said  
10          girder and/or after the construction thereof.


1           6.     The tension force adjustable prestressed girder as claimed in claim 5,  
2           wherein, during construction, a tension force of said non-tension steel wires is  
3           adjusted during or after slab casting, and, after the construction, the tension force of  
4           said non-tension steel wires is adjusted while said bridge or building is being used.

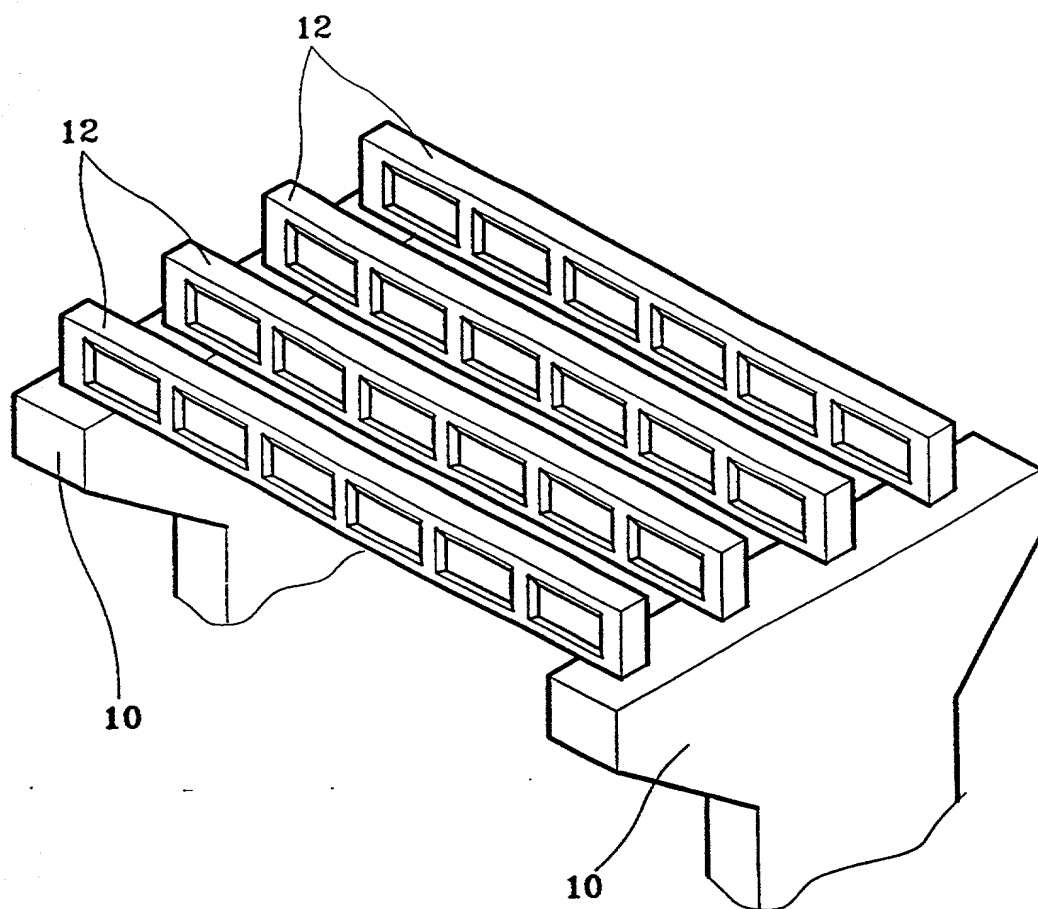1/8  
FIG. 1

2/8  
FIG. 2  
(PRIOR ART)

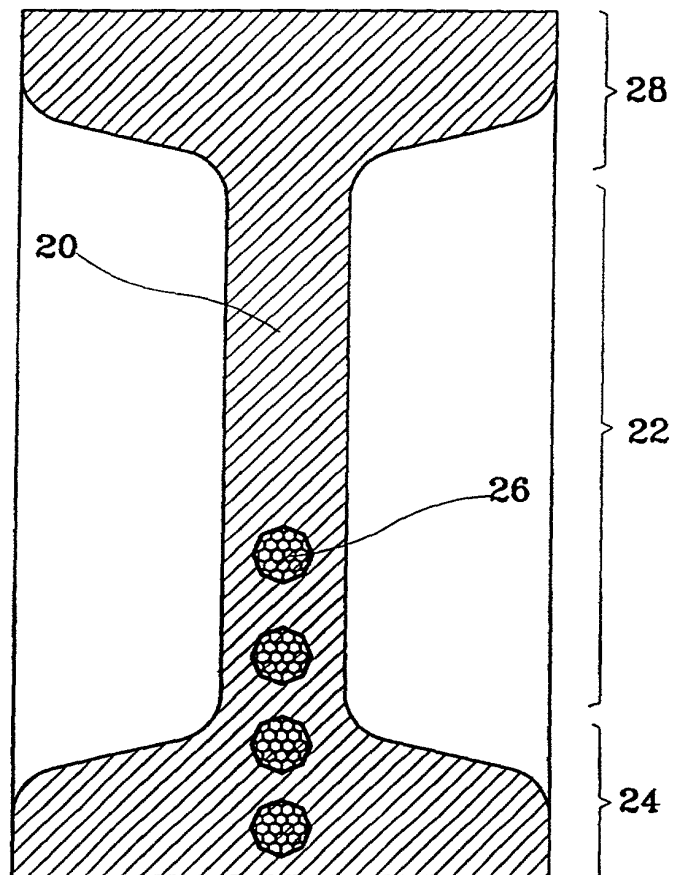


3/8  
FIG. 3A

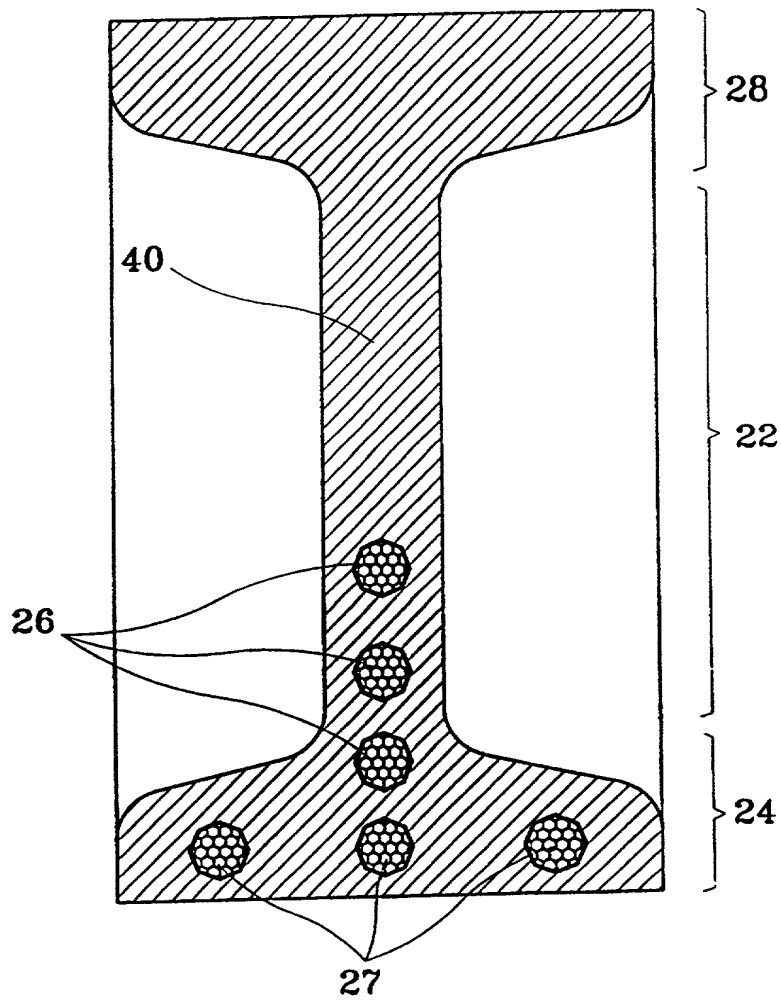

4/8

FIG. 3B

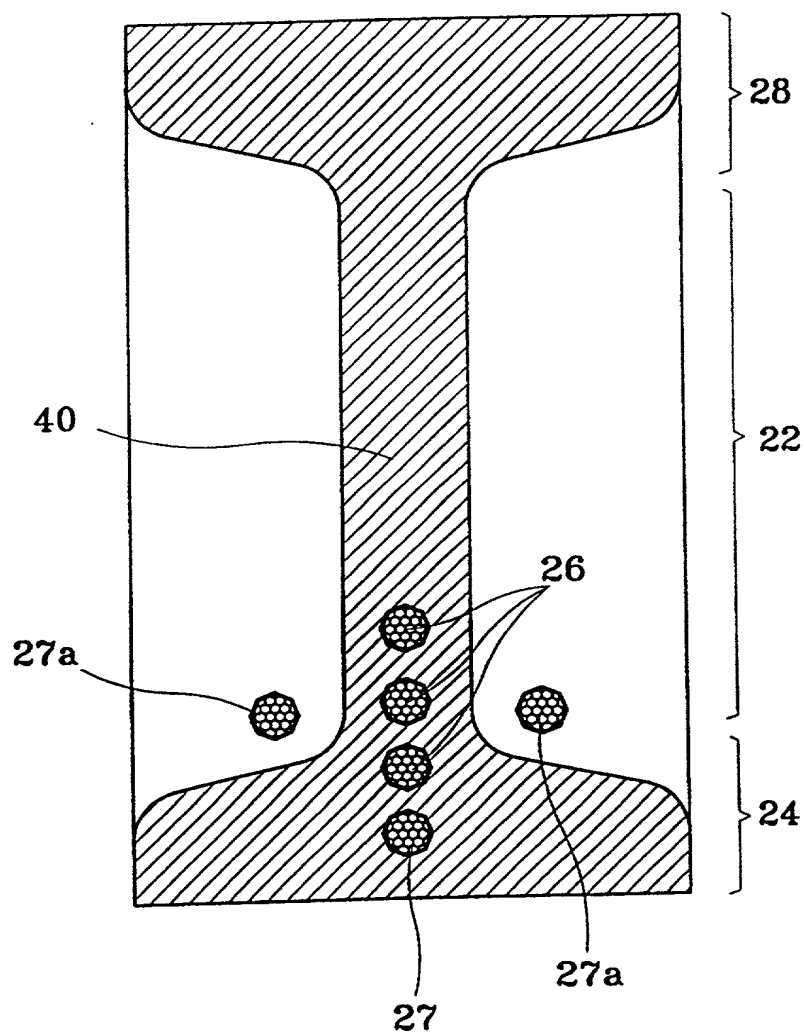

5/8

FIG. 4A

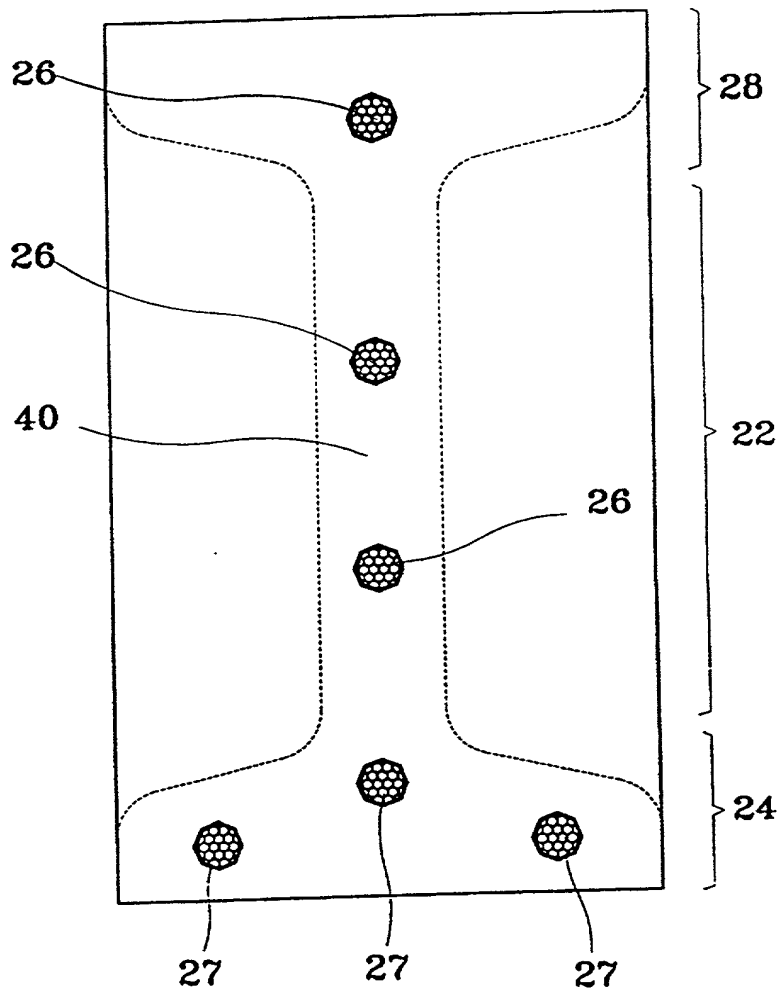


FIG. 4B


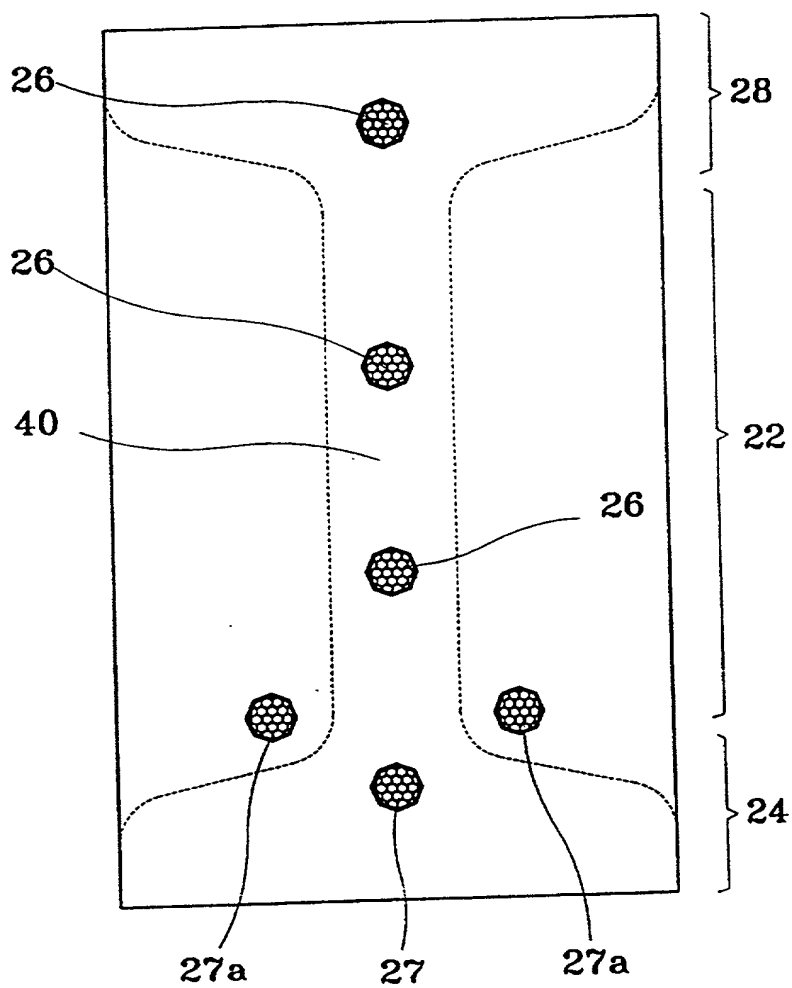


FIG. 5

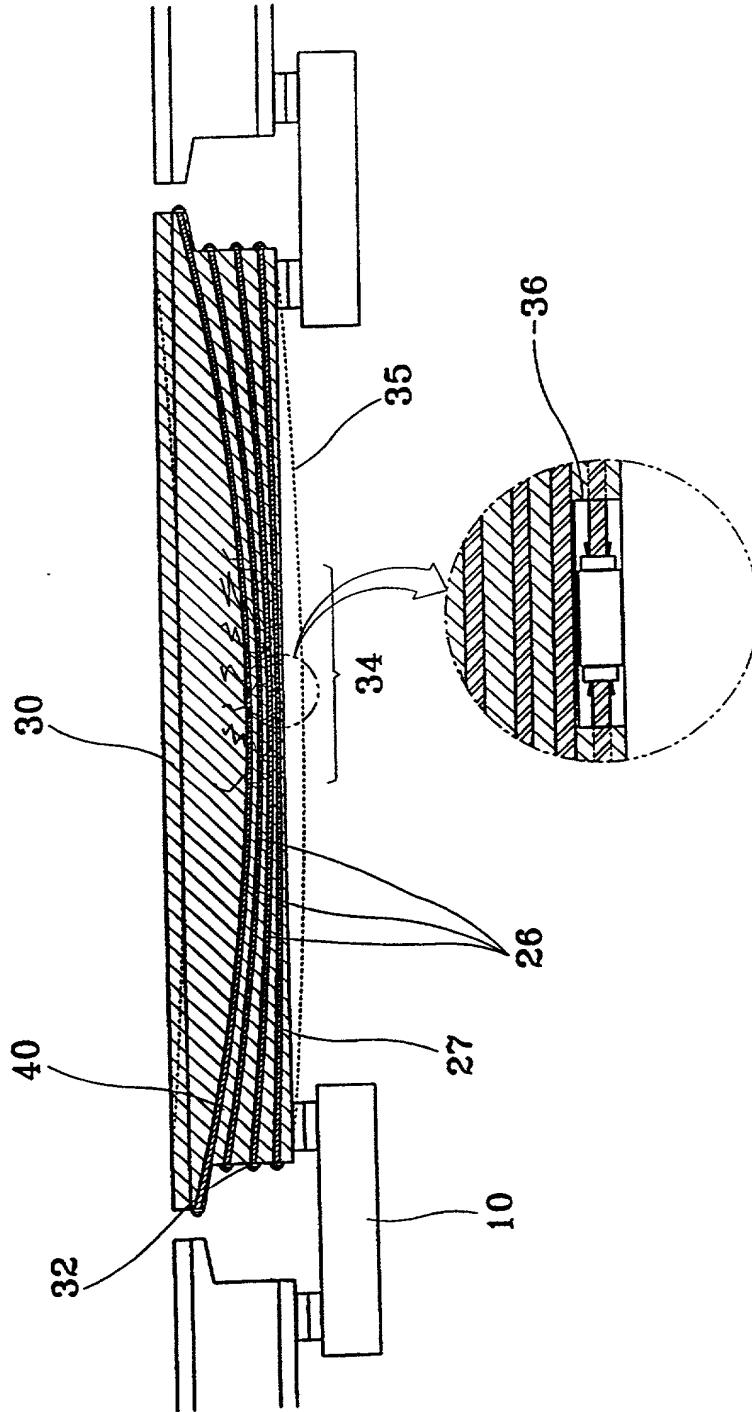

8/8  
FIG. 6


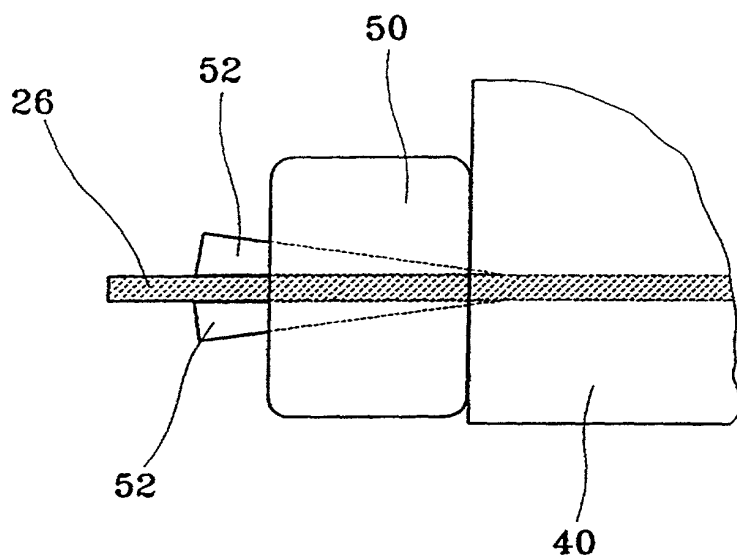


FIG. 7

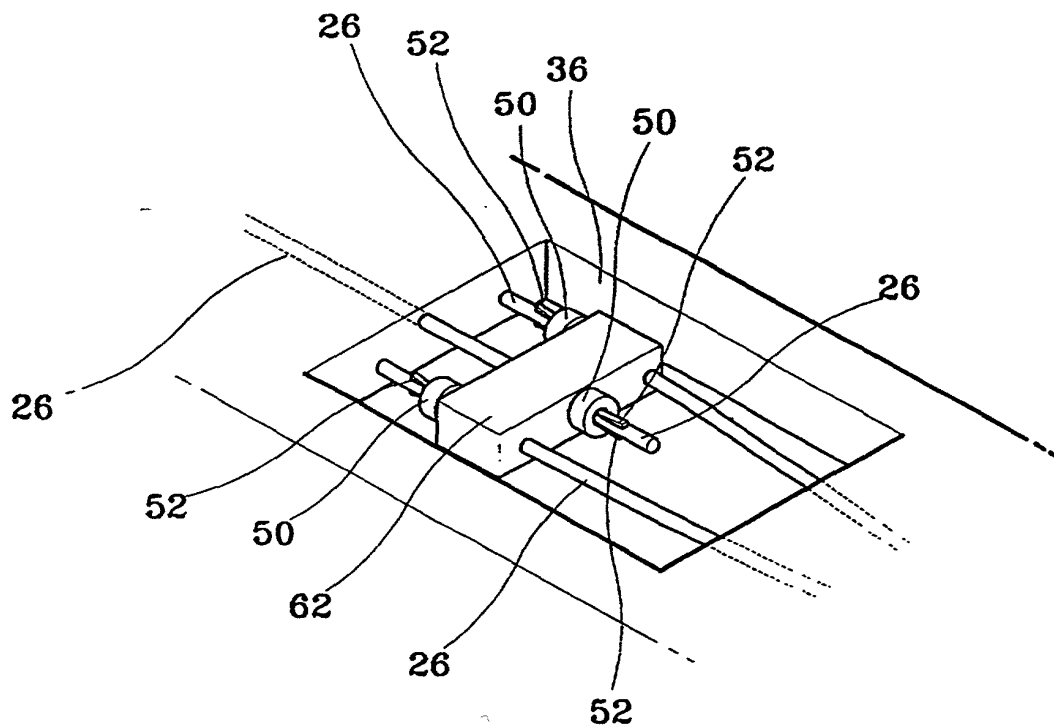

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY**  
(Includes Reference to Provisional and International (PCT) Applications)

Attorney's Docket No.

02823-19

As a below named inventor, I hereby declare that:

My residence, last office address and citizenship are as stated below next to my name;  
I BELIEVE I AM THE ORIGINAL, FIRST AND SOLE INVENTOR (IF ONLY ONE NAME IS LISTED BELOW) OR AN  
ORIGINAL, FIRST AND JOINT INVENTOR (IF PLURAL NAMES ARE LISTED BELOW) OF THE SUBJECT MATTER  
WHICH IS CLAIMED AND FOR WHICH A PATENT IS SOUGHT ON THE INVENTION ENTITLED:

TENSION FORCE ADJUSTABLE PRESTRESSED GIRDER

The specification of which (check only one item below):

- ☐ is attached hereto.
- ☒ was filed as United States Patent Application Number 09/831,337 on 7 May 2001  
and was amended on \_\_\_\_\_ (if applicable).
- ☐ was filed as International (PCT) Application Number \_\_\_\_\_  
on \_\_\_\_\_ (if applicable).  
and was amended on \_\_\_\_\_

I HAVE REVIEWED AND UNDERSTAND THE CONTENTS OF THE ABOVE-IDENTIFIED SPECIFICATION,  
INCLUDING THE CLAIMS, AS AMENDED BY ANY AMENDMENT REFERRED TO ABOVE.

I ACKNOWLEDGE THE DUTY TO DISCLOSE TO THE U.S. PATENT AND TRADEMARK OFFICE ALL INFORMATION  
KNOWN TO ME TO BE MATERIAL TO PATENTABILITY AS DEFINED IN TITLE 37, CODE OF FEDERAL  
REGULATIONS, Sec. 1.56 (as amended effective March 16, 1992);

I do not know and do not believe the said invention was ever known or used in the United States of America before my or our  
invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more  
than one year prior to said application; that said invention was not in public use or on sale in the United States of America more  
than one year prior to said application; that said invention has not been patented or made the subject of an inventor's certificate  
issued before the date of said application in any country foreign to the United States of America on any application filed by me or  
my legal representatives or assigns more than six months prior to said application;

I hereby claim foreign priority benefits under Title 35, United States Code, §§ 119 (a)-(e) of any foreign application(s) for patent  
or inventor's certificate or of any International (PCT) Application(s) designating at least one country other than the United States  
of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT  
International (PCT) Application(s) designating at least one country other than the United States of America filed by me on the  
same subject matter having a filing date before that of the application(s) of which priority is claimed:

**PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119:**

COUNTRY (if PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 U.S.C. § 119
KR	98-47661	07/11/1998	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

\_\_\_\_\_  
(APPLICATION NUMBER)

\_\_\_\_\_  
(FILING DATE)

\_\_\_\_\_  
(APPLICATION NUMBER)

\_\_\_\_\_  
(FILING DATE)

**COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY (CONT'D)**  
(Includes Reference to Provisional and International (PCT) Applications)

Attorney's Docket  
No. 023833-119

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States applications(s) or International (PCT) Application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to the patentability as defined in Title 37, Code of Federal Regulations § 1.56, which became available between the filing date of the prior application(s) and the national or international filing date of this application:

PRIOR U.S. APPLICATIONS OR INTERNATIONAL (PCT) APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120:

**U.S. APPLICATIONS**

**STATUS (check one)**

U.S. APPLICATION NUMBER

U.S. FILING DATE

PATENTED

PENDING

ABANDONED



**PCT APPLICATIONS DESIGNATING THE U.S.**

PCT APPLICATION NO.

PCT FILING DATE

U.S. APPLICATION  
NUMBERS ASSIGNED (if any)

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the U.S. Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

William L. Mathis	17,337	Eric H. Weisblatt	30,505	Bruce T. Wieder	33,815
Robert S. Swecker	19,885	James W. Peterson	26,057	Todd R. Walters	34,040
Platon N. Mandros	22,124	Teresa Stanek Rea	30,427	Ronni S. Jillions	31,979
Benton S. Duffett, Jr.	22,030	Robert E. Krebs	25,885	Harold R. Brown III	36,341
Norman H. Stepno	22,716	William C. Rowland	30,888	Allen R. Baum	36,086
Ronald L. Grudziecki	24,970	T. Gene Dillahunt	25,423	Steven M. duBois	35,023
Frederick G. Michaud, Jr.	26,003	Patrick C. Keane	32,858	Brian P. O'Shaughnessy	32,747
Alan E. Kopecki	25,813	B. Jefferson Boggs, Jr.	32,344	Kenneth B. Leffler	36,075
Regis E. Shutter	26,999	William H. Benz	25,952	Fred W. Hathaway	32,236
Samuel C. Miller, III	27,360	Peter K. Skiff	31,917	Wend L. Weinstein	34,456
Robert G. Mukai	28,531	Richard J. McGrath	29,195	Mary Ann Dillahunt	34,576
George A. Hovanec, Jr.	28,223	Matthew L. Schneider	32,814		
James A. LaBarre	28,632	Michael G. Savage	32,596		
E. Joseph Gess	28,510	Gerald F. Swiss	30,113		
R. Danny Huntington	27,903	Charles F. Wieland III	33,096		

  
**21839**

and:

Address all correspondence to:

Charles F. Wieland III  
BURNS, DOANE, SWECKER & MATHIS, L.L.P.  
P.O. Box 1404  
Alexandria, Virginia 22313-1404


  
**21839**

Address all telephone calls to: Charles F. Wieland III  
(703) 836-6620.

at

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

<b>COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY (CONT'D)</b> (Includes Reference to Provisional and International (PCT) Applications)	Attorney's Docket No. 023833-119
---	-------------------------------------

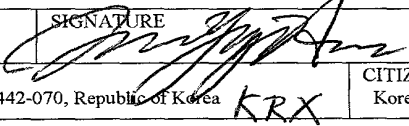FULL NAME OF SOLE OR FIRST INVENTOR Man-yop Han		SIGNATURE 	DATE 24 OCTOBER 2001
RESIDENCE (CITY & STATE/COUNTRY) 304-1302, Sunkyung Apt., Inkye-dong, Paldal-gu, Suwon-city, <u>Kyungki-do</u> , 442-070, Republic of Korea		CITIZENSHIP Korean	
POST OFFICE ADDRESS (HOME ADDRESS) same as residence			
FULL NAME OF SECOND JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			
FULL NAME OF THIRD JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			
FULL NAME OF FOURTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			
FULL NAME OF FIFTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			
FULL NAME OF SIXTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			
FULL NAME OF SEVENTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			
FULL NAME OF EIGHTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			
FULL NAME OF NINTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			
FULL NAME OF TENTH JOINT INVENTOR, IF ANY		SIGNATURE	DATE
RESIDENCE (CITY & STATE/COUNTRY)		CITIZENSHIP	
POST OFFICE ADDRESS (HOME ADDRESS)			